


FIUME

184-2020000029550

FIUME PD SUSPENSION made of gypsum, white, similar to RAL 9003, satined PMMA opal diffuser with converter, max. 260mA, dimmability: not dimmable, cable white, adapter/ceiling base white, pendant length 2000mm, IP20



DRAWING

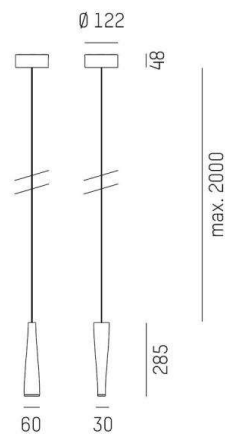


TECHNICAL DETAILS

System perform. [W]	8
Bulb type	LED
Luminous flux [lm]	280
Current sec. [mA]	260
Colour temp. [K]	3000K
CRI	>90
Optics	PMMA opal diffuser
Converter	with converter
Dimming	not dimmable
Voltage [V]	220-240V 50/60Hz
Material	gypsum

Length [mm]	60
Width [mm]	30
Height [mm]	285
Pendant length [mm]	2000
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	1,20

Colour lamp	white
RAL	9003
Colour adapter/ceiling base	white
Electric wire	white
EAN-Number	9010506763768
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

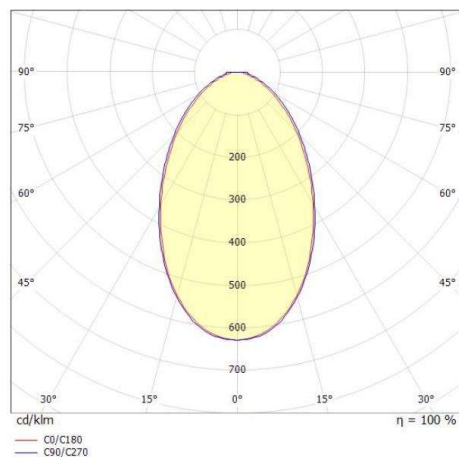

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.