


FIUME

184-2020000029660


FIUME PD SUSPENSION made of gypsum, black, similar to RAL 9005, satined PMMA opal diffuser with converter, max. 260mA, dimmability: not dimmable, cable black, adapter/ceiling base black, pendant length 2000mm, IP20



DRAWING

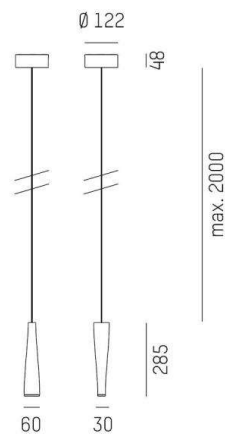

LIGHT DISTRIBUTION CURVE

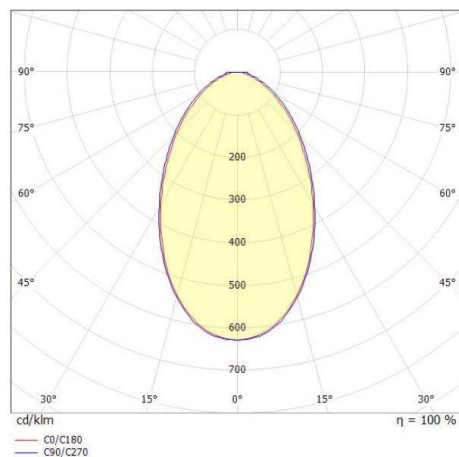

TECHNICAL DETAILS

System perform. [W]	8
Bulb type	LED
Luminous flux [lm]	280
Current sec. [mA]	260
Colour temp. [K]	3000K
CRI	>90
Optics	PMMA opal diffuser
Converter	with converter
Dimming	not dimmable
Voltage [V]	220-240V 50/60Hz
Material	gypsum
Length [mm]	60
Width [mm]	30
Height [mm]	285
Pendant length [mm]	2000
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	1,20
Colour lamp	black
RAL	9005
Colour adapter/ceiling base	black
Electric wire	black
EAN-Number	9010506763782
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	E



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.