




DIMENSIONS



Name	ALFA 3W 3000K P
Reference	A0300101P
Color	Brushed silver matt anodized
RAL	Electrolytic bath
Category	WALL & FLOOR LIGHTS

Type	LED
Gross luminous flux	360 lm
Colour temperature	3000 K
Power	3 W
Current	350 mA
LED lifespan	L80B10 >60.000h

Driver	Excluded: Must be placed on remote - Connection clamp excluded
Power values of the system	3 W
Dimming	Please Consult
Electrical insulation class	⚡

Sealing	IP65
Wireless control	Please Consult
Recess measurements	Ø40 mm
Weight	195 g
Packaged weight	240 g
Packaging dimensions	136 x 97 x 68,5 mm
Units per package	1
Materials	Aluminium

PRODUCT

LIGHT SOURCE


LIGHTING FIXTURE | ELECTRICAL DATA

OTHER DATA



Alfa is a LED wall appliqué whose function is for decoration and signage. Individually elegant, but versatile at the same time as it can be combined and mounted to form very attractive luminous sets.

POLAR DIAGRAM

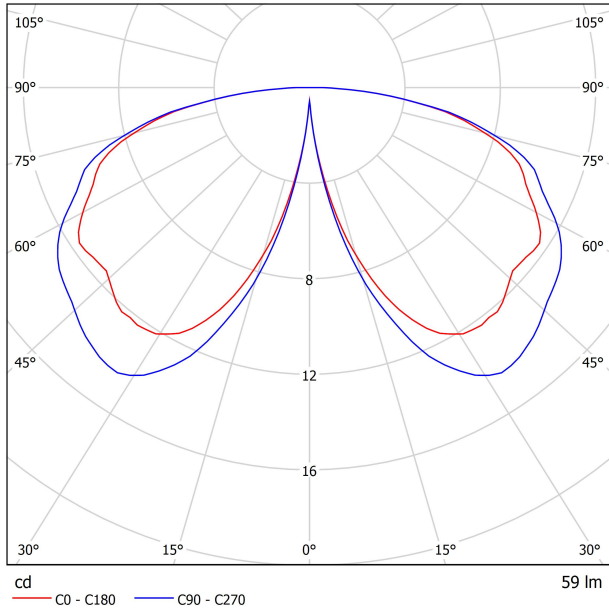

CONICAL DIAGRAM

1.0	8.87 10.39	E(0°) E(C90) 77.3° E(C0) 79.1°	1 0 0
2.0	17.75 20.77	E(0°) E(C90) 77.3° E(C0) 79.1°	0 0 0
3.0	26.62 31.16	E(0°) E(C90) 77.3° E(C0) 79.1°	0 0 0
4.0	35.50 41.54	E(0°) E(C90) 77.3° E(C0) 79.1°	0 0 0
5.0	44.37 51.93	E(0°) E(C90) 77.3° E(C0) 79.1°	0 0 0
Distance [m]	Cone Diameter [m]	Illuminance [lx]	
— C0 - C180 (Half-value Angle: 158.2°)			
— C90 - C270 (Half-value Angle: 154.6°)			



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

