


ALGAE M

696-001020329730v1

ALGAE M PD SUSPENSION made of aluminium, chalk, similar to RAL 7030, high-efficiently vacuum deposited synthetic reflector beam 38°, light output direct, with converter, max. 700mA, dimmability: not dimmable, cable black, soft-touch, adapter/ceiling base chalk, pendant length 1500mm, IP20




DRAWING

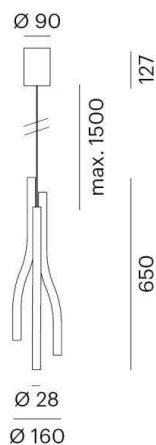

TECHNICAL DETAILS

System perform. [W]	14
Bulb type	LED
Luminous flux [lm]	1250
Current sec. [mA]	700
Colour temp. [K]	3000K
CRI	>90
Optics	vacuum deposited synthetic reflector
Designer	Rainer Mutsch
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	38°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	140
Height [mm]	650
Pendant length [mm]	1500
Diameter [mm]	160
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,68
Colour lamp	chalk
RAL	7030
Colour adapter/ceiling base	chalk
Electric wire	black, soft-touch
EAN-Number	9010506238693
Lifetime [h]	50 000 L80 B10
Energy efficiency cl.	G
No. of luminaires B16A	50

LIGHT DISTRIBUTION CURVE

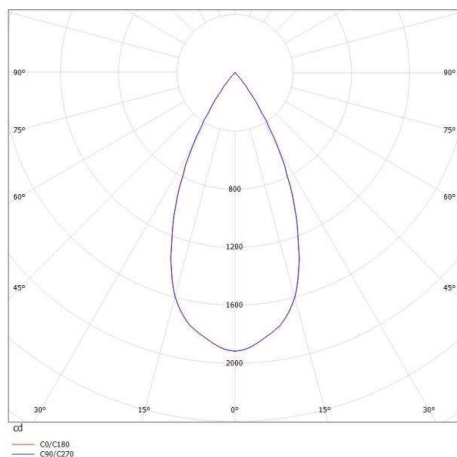

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.