




DIMENSIONS



ACCESSORIES

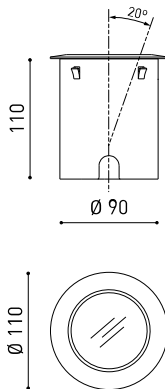

DRIVER OPTIONS

Name	DARK M ASYMM 3000K NX
Reference	A4400011NX
Color	Stainless steel
Category	WALL & FLOOR LIGHTS
Type	LED
Gross luminous flux	665 / 900 / 1265 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI>90
Power	4,6 / 6,7 / 10,5 W
Current	140 / 200 / 300 mA
Efficacy	145 / 134 / 120 lm/W
LED lifespan	L80B10 >60.000h
Lighting efficiency	75%
Light beam angle	38°
Driver	Excluded: Must be placed on remote
Power values of the system	4,6 / 6,7 / 10,5 W
Dimming	No Dim - Other DIM, please consult
Electrical insulation class	III
Sealing	IP65
Wireless control	Please Consult
Impact resistance	IK08
Recess measurements	Ø92 mm
Outdoor Use	Yes
Maximum surface temperature	80°
Supported load	7000
Weight	595 g
Packaged weight	700 g
Packaging dimensions	155 x 137 x 124 mm
Units per package	1
Materials	Stainless Steel (AISI 304) / Aluminium / Glass-Transparent

OTHER DATA



Dark is a floor-recessed LED luminaire used together with elements that we wish to illuminate upwards, to be able to highlight their architectonic presence (structures, walls, trees, gardens, cornices, etc.). *** NOTE: Recessed box included



DRIVER OPTIONS*	P	I	
0434-00-36	4,6W	140mA	1 Dark
0434-00-37	6,7W	200mA	1 Dark
0434-00-38	10,5W	300mA	1 Dark

220
240 V~

 NO DIM | IP20
*DIM Drivers please consult



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

