




## DIMENSIONS



Name	DREAM 3000K N
Reference	A2790001N
Color	Matt black
RAL	Colour in the mass looks alike RAL 7022
Category	WALL & FLOOR LIGHTS

## PRODUCT

Type	LED
Gross luminous flux	215 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 3
Colour Rendering Index	CRI > 90
Power	2,1 W
Current	700 mA
Efficacy	102 lm/W
LED lifespan	L80B10 (Tc=85°C) > 60.000h

## LIGHT SOURCE

Lighting efficiency	94%
Light beam angle	17°

## LIGHTING FIXTURE | PHOTOMETRIC DATA

Driver	Included
Power values of the system	3,23 W
Voltage	220V/240V
Frequency	50/60 Hz
Dimming	No Dim
Electrical insulation class	⊕

## LIGHTING FIXTURE | ELECTRICAL DATA


Sealing	IP20
Weight	300 g
Packaged weight	461 g
Packaging dimensions	350 x 118 x 108 mm
Units per package	1
Materials	Aluminium / Silicone

## OTHER DATA



Dream is a wall light conceived for reading light applications in bed-head areas. Dream is easily adjustable by hand, flexible and versatile. Whatever position you adjust it to, it will easily adapt to its position and may maintain it steadily. Its silicone release coating and the smooth lines of its geometry make this luminaire a visually highly attractive piece with a pleasant touch. Dream offers an exceptional lighting quality for reading while having an extraordinary low power consumption. The focal angle of the clearly defined light beam allows to concentrate the light in the desired area and prevents light contamination when two persons share the bed.

POLAR DIAGRAM

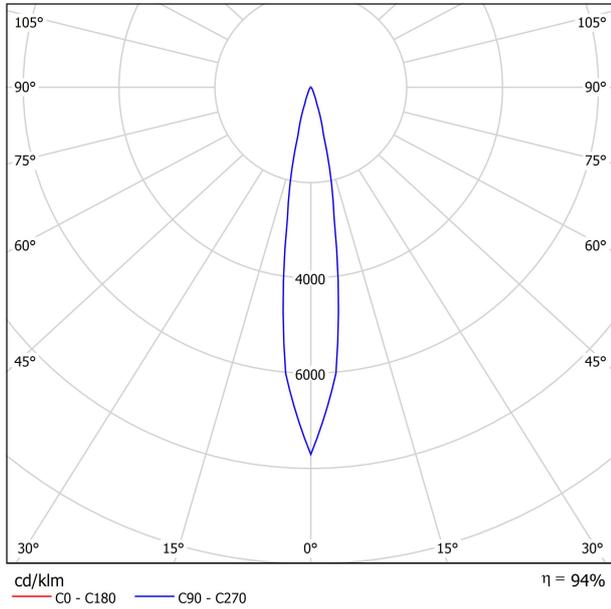

CONICAL DIAGRAM

