




DIMENSIONS



ACCESSORIES

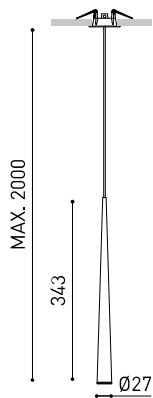

CORD ACCESSORY



WIRE TRIMLESS ACCESSORY

| | |
|-----------|-----------------------|
| Name | HOLLY 2M 19° 3000K MC |
| Reference | A2810001MC |
| Color | Metallized copper |
| RAL | Electrolytic bath |
| Category | SUSPENSION |

PRODUCT

| | |
|------------------------|---------------------------|
| Type | LED |
| Gross luminous flux | 210 Lm |
| Colour temperature | 3000 K |
| Chromatic stability | MacAdam Step 3 |
| Colour Rendering Index | CRI>90 |
| Power | 2,1 W |
| Current | 700 mA |
| Efficacy | 100 Lm/W |
| LED lifespan | L80B10 (Tc=85°C) >60.000h |

LIGHT SOURCE

| | |
|---------------------|-----|
| Lighting efficiency | 90% |
| Light beam angle | 19° |

LIGHTING FIXTURE | PHOTOMETRIC DATA

| | |
|-----------------------------|--------------------------|
| Driver | Included |
| Power values of the system | 2,80 W |
| Voltage | 220V/240V |
| Frecuency | 50/60 Hz |
| Dimming | No Dim |
| Electrical insulation class | <input type="checkbox"/> |

LIGHTING FIXTURE | ELECTRICAL DATA

| | |
|---------------------------|---|
| Sealing | IP20 |
| Wireless control | Please Consult |
| Recess measurements | Ø50 mm |
| Cord length | Max. 2 m |
| Fast adjustment tensioner | No |
| Weight | 321 g |
| Packaged weight | 450 g |
| Packaging dimensions | 385 x 103 x 78 mm |
| Units per package | 1 |
| Materials | Aluminium / Acrylonitrile Butadiene Styrene |


OTHER DATA




Holly is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow. To install the luminaire, Holly gets implemented by means of a recessed ceiling base, discrete and integrated. Its most frequent applications are counters, bedside tables, stairwells, etc.



POLAR DIAGRAM

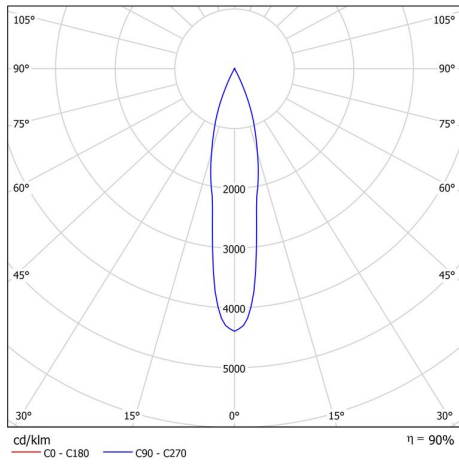

CONICAL DIAGRAM

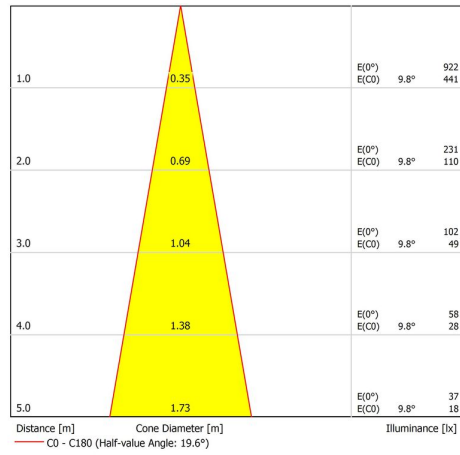



| PRODUCT | |
|-----------|--|
| Model | Cord Accessory |
| Reference | 02230000 W N |
| Colour | W <input type="checkbox"/> RAL 9016 N <input type="checkbox"/> RAL9005 |
| Category | Accessories |

DIMENSIONAL DRAWING





| PRODUCT | |
|-----------|---|
| Model | Coaxial Trimless |
| Reference | A023-00-03- W N |
| Colour | W <input type="checkbox"/> RAL 9016 N <input type="checkbox"/> RAL 9005 |
| Category | Accessories |



DIMENSIONAL DRAWING



Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.