




#### DIMENSIONS



#### AWARDS



reddot winner 2021  
lighting design



archiproducts  
DESIGN AWARDS  
WINNER 2021



PREMIO  
ADCV  
2022  
ORO

Name	UP 3000K NT
Reference	A4020001NT
Color	Textured black
RAL	9005
Category	WALL & FLOOR LIGHTS

#### PRODUCT

Type	LED
Gross luminous flux	4000 lm
Colour temperature	3000 K
Chromatic stability	MacAdam Step 2
Colour Rendering Index	CRI > 90
Power	31 W
Current	930 mA
Efficacy	129 lm/W
LED lifespan	L80B10 > 60.000h

#### LIGHT SOURCE

Lighting efficiency	76%
Light beam angle	94°

#### LIGHTING FIXTURE | PHOTOMETRIC DATA

Driver	Included - Plug   Connect
Power values of the system	34,44 W
Dimming	ON BOARD
Electrical insulation class	□

#### LIGHTING FIXTURE | ELECTRICAL DATA


Sealing	IP20
Weight	10765 g
Packaged weight	12135 g
Packaging dimensions	1924 x 252 x 265 mm
Units per package	1
Materials	Aluminium / Iron

#### OTHER DATA




Like the line that separates heaven and earth, Up marks a horizon in space. Its light, projected vertically, evokes a natural glow that penetrates the room. The luminaire bathes the ceiling plane directly, while the environment is illuminated with a comfortable indirect light.

POLAR DIAGRAM

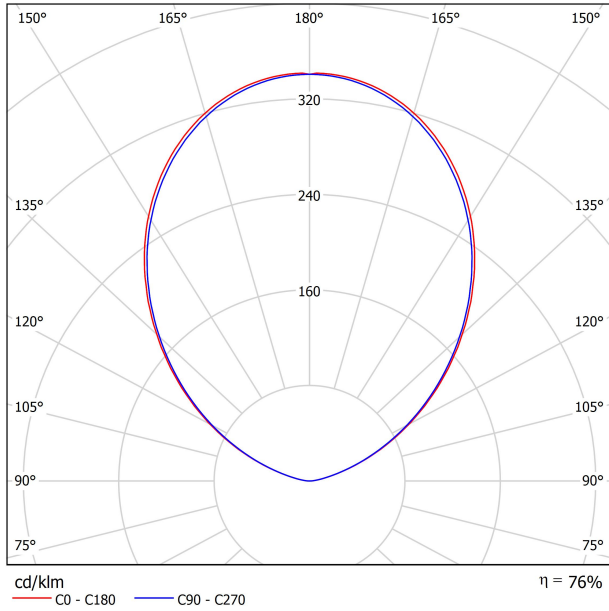

CONICAL DIAGRAM

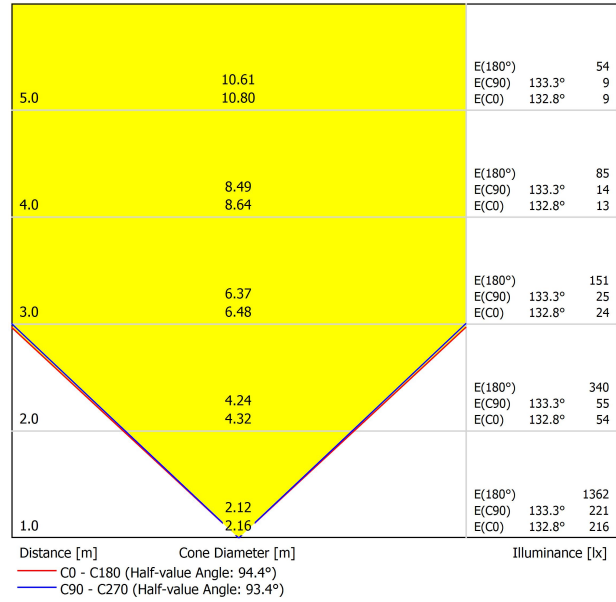



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES  
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL  
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT  
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI  
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato  
 Cut the power supply to the luminaire  
 Couper l'alimentation du luminaire  
 Interrompere l'alimentazione dell'apparecchio  
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho  
 Remove light source(s) for disposal  
 Retirer la (les) source(s) lumineuse(s) pour l'élimination  
 Rimuovere la/le sorgente/e di luce per lo smaltimento  
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho  
 Remove the battery for decommissioning  
 Retirer la batterie pour sa mise au rebut  
 Rimuovere la batteria per la dismissione  
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho  
 Remove control gear for disposal  
 Retirer le dispositif de commande pour l'élimination  
 Rimuovere l'alimentatore per lo smaltimento  
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE  
 Send the materials to a WEEE collection centre  
 Envoyer les matériaux dans une déchetterie DEEE  
 Inviare i materiali ad un centro di raccolta RAEE  
 Die Materialien in einem WEEE-Zentrum entsorgen

