


Ombra

220-240V AC dimmable (DALI/Push DIM)  
L16019.165.0502




Data sheet

|                          |                          |
|--------------------------|--------------------------|
| CODE                     | L16019.165.0502          |
| SYSTEM POWER CONSUMPTION | 35W                      |
| EFFICACY                 | 39.09lm/W                |
| LIGHT SOURCE             | LED                      |
| COLOUR TEMPERATURE       | 2700K Ra>90              |
| POWER SUPPLY             | 220-240V AC              |
| FREQUENCY                | 50/60Hz                  |
| ELECTRICAL CONFIGURATION | dimmable (DALI/Push DIM) |
| DRIVER                   | integrated included      |
| NOMINAL LUMINOUS FLUX    | 4344lm                   |
| LUMEN OUTPUT             | 1368lm                   |
| EFFICIENCY               | 31.5%                    |
| WEIGHT                   | 1,25 Kg                  |
| PROTECTION DEGREE        | IP20                     |
| COLOUR TOLLERANCES       | SDCM <3                  |
| PACKING DIMENSIONS       | 0,0 x 0,0 x 0,0 cm       |



Suspension lighting fixture for interiors, with direct light emission.  
Extruded aluminium frame with polyacrylic paint finish in mat black or mat brass.  
White PVC-coated woven fabric shade.  
Polycarbonate inner diffuser screen.  
Steel suspension wire 3m (118.1") long with quick adjuster.  
3m (118.1") long, transparent PVC coaxial suspension and power cable.  
Feeding canopy with ceiling mounting bracket in pickled sheet metal and extruded aluminium housing with polyacrylic paint finish in mat black or mat brass.

Technical drawing

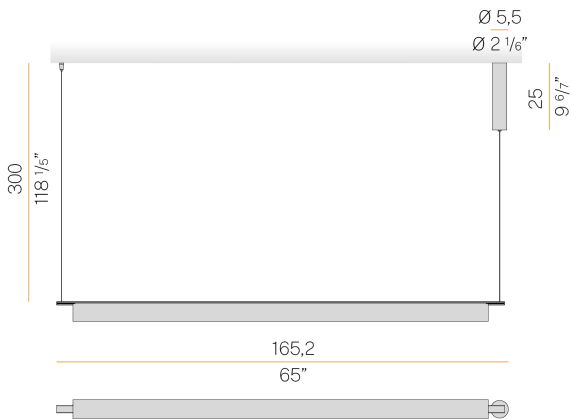

Polar diagram