

Zero

220-240V AC ON-OFF
A03519.100.0401

mat brass




Data sheet

CODE	A03519.100.0401
SYSTEM POWER CONSUMPTION	20W
EFFICACY	61.35lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	1980lm
LUMEN OUTPUT	1227lm
EFFICIENCY	62%
WEIGHT	1,58 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	10,0 x 105,0 x 5,0 cm



Ceiling or wall lighting fixture for interiors, with direct and indirect light emission. Pickled sheet metal structure in white, bronze or mat brass polyacrylic paint, or with gold leaf coating, or in polished stainless steel. Specular aluminium reflector. Cover in brass with white, bronze or mat brass polyacrylic paint, or with gold leaf coating, or with galvanic chrome plating. Extruded polycarbonate diffuser with opaline finish.

Technical drawing

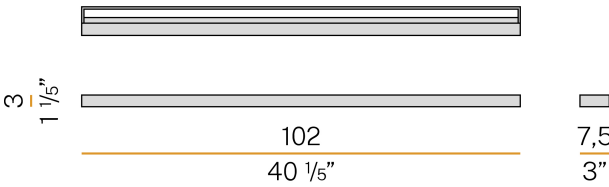

Application



Polar diagram

