

Frame

bollard light



Table of contents

1. Product overview	Page 2
2. Finishes and materials	Page 2
3. Light Source & dimming	Page 3
4. Photometric data and technical information	Page 3
5. Ordering codes	Page 4
6. Certifications & standards	Page 6
7. Maintenance & Cleaning	Page 6

Versions



FRA_4054X
Page 4



FRA_4055X
Page 4



FRA_4056X
Page 5

Frame

bollard light

1. Product overview

Bollard lamp for accent or ambient lighting. Metallic structure with transparent Pyrex glass diffuser, encircled by a metal frame. Integrated LED concealed in the upper section projects indirect light downward. Hard wired (no plug). Built-in driver for direct mains connection.

Surface-mounted on a solid base (concrete or similar). Not suitable for installation on soil or grass.

Double-layer protective coating for high resistance to corrosion and maritime environments.



2. Finishes and Materials



96 Anthracite

87 Bronze

Transparent Pyrex Glass

Frame

bollard light

3. Light Source & Dimming

Lamping (Outdoor version):

LED 6,2W (2700K / Ang. 70° / >90 CRI / 350mA)

100-240V / Typ 725 lumens

*Integrated LED module (included).

Light colour and perceived tone:

The LED operates at 2700K, providing a warm tone. However, the use of a clear borosilicate (Pyrex) glass diffuser may visually shift the light toward a cooler appearance, closer to 3000K, depending on the installation context. Additionally, reflections and surrounding surfaces (such as walls or floors) can influence the perceived colour temperature of the emitted light.

Dimming options:

Standard: NON DIMMABLE


Optional: TRIAC, DALI, CASAMBI

4. Photometric Data and Technical Information

Photometric data corresponds to the output of each individual lamp.
Access to photometric files in download area.

2D / 3D / BIM Files available.

Access to files in download area [here](#)



Frame

bollard light

5. Ordering Codes

Lamping 4054X (Outdoor)

LED 6,2W (2700K / Ang. 70° / >90 CRI / 350mA)

100-240V / Typ 725 lumens


DIM: NON DIMMABLE (Optional TRIAC, DALI, CASAMBI)

Finishes:

96 Anthracite

87 Bronze



Drawing	Mounting	Setting	Finish Body	Ordering Code
FRA_4054X IP65 	Bollard light. Hard wired (no plug). Surface mounted on a solid base.	Outdoor	Anthracite	FRA_4054X_96M
		Outdoor	Bronze	FRA_4054X_87M

Lamping 4055X (Outdoor)

LED 6,2W (2700K / Ang. 70° / >90 CRI / 350mA)

100-240V / Typ 725 lumens


DIM: NON DIMMABLE (Optional TRIAC, DALI, CASAMBI)

Finishes:

96 Anthracite

87 Bronze

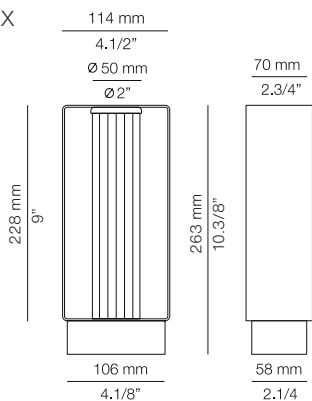

Drawing	Mounting	Setting	Finish Body	Ordering Code
FRA_4055X IP65 	Bollard light. Hard wired (no plug). Surface mounted on a solid base.	Outdoor	Anthracite	FRA_4055X_96M
		Outdoor	Bronze	FRA_4055X_87M


Frame


bollard light

5. Ordering Codes

Lamping 4056X (Outdoor)
LED 6,2W (2700K / Ang. 70° / >90 CRI / 350mA)
100-240V / Typ 725 lumens
DIM: NON DIMMABLE (Optional TRIAC, DALI, CASAMBI)

Finishes:
96 Anthracite
87 Bronze




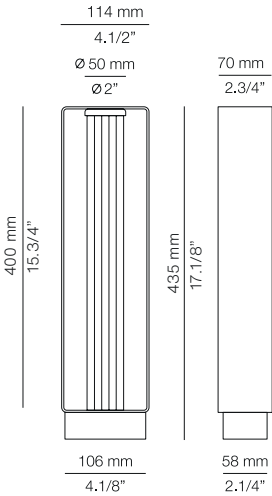Drawing	Mounting	Setting	Finish Body	Ordering Code
FRA_4056X IP65 	Bollard light. Hard wired (no plug). Surface mounted on a solid base.	Outdoor	Anthracite	FRA_4056X_96M
		Outdoor	Bronze	FRA_4056X_87M

Frame

bollard light

6. Certifications & Standards



Warranty: 2 years

100% made in Spain

7. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.