

FINLIN ROUND WALL 1.0

371184B3

Project
Туре
Notes
Quantity
Date

GENERAL

Wall , Surface
Black Matt
RAL9005 ^a
IP20
Interior
Output: 1280 lm

LED

 $2700\,\mathrm{K}$


ELECTRICAL

phase-cut dim 220 - $240\,\mathrm{V}$ Total connected power 16.0 W Class 1

PHYSICAL


Diameter 400 mm
Height 115 mm
0.32 kg

^a Color may deviate slightly due to production conditions.

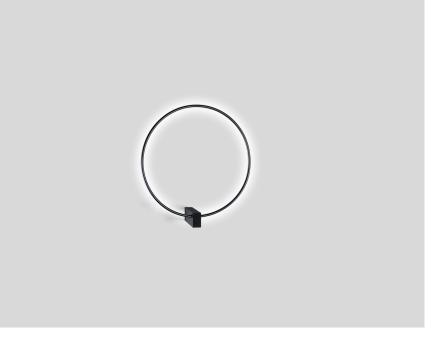



Round wall surface luminaire made from aluminium; indirect light distribution; surface Black Matt; powder coated, matt texture; RAL9005; opal PMMA diffuser; PCB 3-step binning; phase-cut dim; light colour 2700 K; CRI \geq 90; 220 - 240 V; degree of protection IP20; PC1; driver included; optional spacer available for overlapping; light source replaceable by an authorized professional; control gear replaceable by enduser;





FINLIN ROUND WALL 1.0

371184B3

MOUNTING

wall-/base-spacer

TYPE FINLIN ROUND L·W·H (MM) $52 \cdot 30 \cdot 38$ ORDERCODE 900196B0

 ['371184B3'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 10%. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.
 October 16, 2023

 © Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com
 2/2