


FREYA

5092-4LGT

Design Claus Breinholt

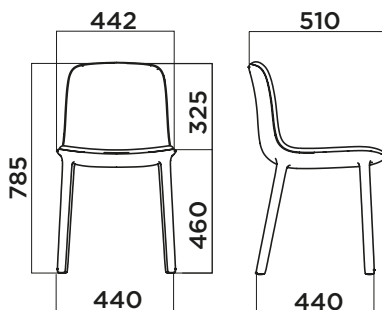

FRAME

TELAIO
BASTIDOR

Post consumer industrial Polypropylene + Glass Fiber

Plastica post consumo industriale + Fibra di vetro

Plástico industrial posconsumo + Fibra de vidrio



IS011



IS022



IS503

Polypropylene + Glass Fiber

Polipropilene + Fibra di vetro

Polipropileno + Fibra de vidrio



R9001



P480C



P421C

UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Seat specifications: foam density 50 kg/m³ as per normative UNI EN ISO 845, fireretardant 11M

Specifiche sedile: densità schiuma 50 kg/m³ come da normativa UNI EN ISO 845, ignifugo 11M

Características técnicas asiento : espuma de densidad 50 kg/m³ según norma UNI EN ISO 845, ignifugo 11M

- A Space
- B Eco Leather
- C Step, Step Melange, Nuvole
- D Reflect 
- E Oceanic  Yoredale
- F Steelcut Quartet, Canvas2
- G Divina Melange, Fiord
- H N/A

FEET

PIEDINI
PIES DE APOYO

Polyethylene

Polietilene

Polietileno

CERTIFICATIONS

CERTIFICAZIONI
CERTIFICADOS

