

Lucy C 12W

LM081C
empotrado recessed

1056Lm / 3000K
IP43 / CRI ≥ 97 / 42°

HER
Light Lovers.



DESCRIPCIÓN DESCRIPTION

Formato cuadrado con diseño limpio y elegante. Acabado especial mate texturizado.

Square tilting downlight with special mat texturized finish. It incorporates a high efficiency and low luminance reflector and a passive dissipation LED

REFERENCIAS REFERENCES

LM081C 3000K 1056Lm 88Lm/W

GENERAL

negro black blanco white

empotrado recessed

IP43

IK07

APARATO DE ILUMINACIÓN LIGHTING FIXTURE

42°

IRC ≥ 97 CRI ≥ 97

IP43

MacAdam ≤ 2

UGR N/A

difusor transparente

clear diffuser

valores de potencia del sistema (LED + driver): 13,2W

power values of the system (LED + driver): 13,2W

ACCESORIOS ACCESSORIES

no disponible

not available

ELÉCTRICA ELECTRICAL

12W

220-240VAC 50/60Hz

equipo incluido

gear included

MEDIDAS MEASURES

78mm x 78mm

altura: 91mm

height: 91mm

REGULACIÓN DIMMING

on / off

corte de fase IGBT/TRIAC

phase-cut dimming IGBT/TRIAC

1-10V

pulsador

push

DALI

RECORTE CUTOUT

70 x 70mm

min. espesor del techo: 13mm


min. ceiling thickness: 13mm

máx. espesor del techo: 19mm

max. ceiling thickness: 19mm

profundidad empotrada: 91mm

recessed depth: 91mm

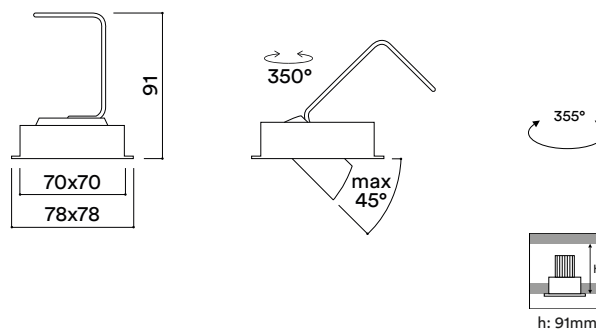

H(m)	D(cm)	Lux
1	75	2184
2	150	546
3	224	243

3000K 42°



cambio sin previo aviso change without notice